

Industrial hermetic laser line generator with rectilinearity correction ML-28PGL-520-6




Laser line generator



Power supply for TS-35mm bar



Power supply with LEMO connector

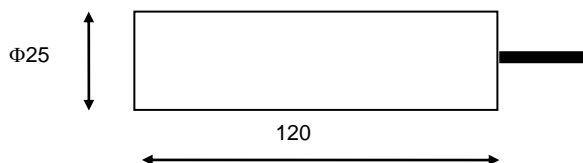

Technical data:

- Safety Class 1M from PN-EN 60825 1:2014;
- Wavelength $\lambda=520\text{nm}$;
- Average Output Power 6mW;
- Operating Voltage 2,7V÷5,5V;
- Operating Current <500mA;
- Optics: aspherical acrylic lens F=8mm; NA=0,28; rod lens $\phi 5$;
- Line generating angle $\sim 90^\circ$;
- Possibility to focus at any distance from 30cm to infinity; (preset: infinity with < 2mrad beam divergence);
- Aluminium housing (black anodized);
- International Protection Rating IP65;
- Operating temperature $0^\circ\pm 60^\circ\text{C}$;
- Storage temperature $-40^\circ\pm 85^\circ\text{C}$;
- LiYY 2x0,25 $\phi 4,1\text{mm}$ wire; 2m long;
- Electrical connection markers (when using power supply for TS-35mm bar):
 - brown - positive
 - white - negative
- Electrical connection markers (when using power supply with LEMO connector):
 - braid - positive
 - central vein - negative

WARNING:

Take precautions to avoid electrostatic discharge and momentary power spikes above 6V. When using simple power supplies, it is important to switch the mains power system on first, then switch the laser module on. To shut off - reverse the order.